


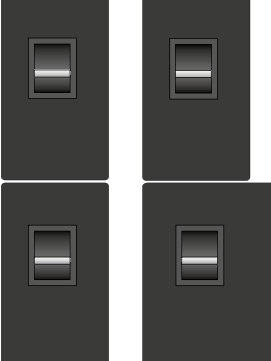



## RS112/RS115/RS210/RS212/RS410– Quick Installation Guide & Overview

Congratulations on the purchase of your TC Electronic speaker cabinet! While connecting and setting up these speaker cabinets is easy and straightforward, we recommend reading this installation guide before usage. Enjoy!

### Stacking Cabinets

Combine up to three RS112/RS115/RS210/RS212/RS410 cabinets in any combination you like!

				
<p><b>2 RS210 speakers stacked:</b> Plenty of low-end and power with the precise, fast and defined tone usually associated with 10" speakers.</p>	<p><b>1 RS112 + 1 RS210:</b> For a combination of precision and plenty of low-end from the 1 x 12" cabinet.</p>	<p><b>1 RS115 + 1 RS410:</b> This classic setup offers a perfect combination of warm low-end and punchy articulate highs.</p>	<p><b>1 RS210 + 1 RS212:</b> For a combination of precision and even more low-end from the 2 x 12" cabinet.</p>	<p>Three Cabinets: An RH450 or RH750 will drive any combination of up to three RS cabinets.</p>

### Safety first

For the safety of your fellow musicians and your own, please address the stability of stacked cabinets and take the proper precautions to prevent the stack from being unstable or tipping over. Also notice that only two cabinets should be stacked vertically.

### Specifications

- Eminence custom US drivers  
RS112 = 1 x 12"; RS115 = 1 x 15";  
RS210 = 2 x 10"; RS212 = 2 x 12";  
RS410 = 4 x 10"
- RS112, RS210, RS212:  
Dual Concentric Tweeter (33 mm aluminum coil Eminence driver)
- RS410: 33 mm aluminum coil Eminence driver
- 18 mm plywood
- Carved rounded hardwood corner pieces
- "Skid-free" surface treatment
- Metal grill
- RS112/RS115/RS210/RS212:  
Rear ported
- RS410: Front ported

### Dimensions

(Width x Height x Depth)

- RS112: 356 x 356 x 498 mm
- RS115: 664 x 596 x 427 mm
- RS210: 356 x 664 x 356 mm
- RS212: 356 x 664 x 498 mm
- RS410: 664 x 596 x 427 mm

### Weight

- RS112: 13 kg / 29 lbs
- RS115: 26 kg / 57 lbs
- RS210: 21 kg / 46 lbs
- RS212: 24 kg / 52 lbs
- RS410: 37 kg / 82 lbs

Subject to change without notice.

### Important Safety Instructions

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with dry cloth.
- Only use attachments/accessories specified by the manufacturer.
- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.

### Caution

You are cautioned that any change or modifications not expressly approved in this manual could void your authority to operate this equipment.

### Service

- There are no user-serviceable parts inside.
- All service must be performed by qualified personnel.

### Connections & Controls

#### Speaker Connections – 8 Ohm

The speakON connectors can be used for both input and link. Connect the amp output to one of the connectors and link to a second cabinet using the other connector.



#### HF LEVEL control

All cabinet types except for RS115 are equipped with dual concentric tweeters. Use the HF LEVEL control to adjust the amount of high-end frequencies.