

EUROPOWER EPX4000/EPX2800

EUROPOWER EPX4000: Professional 4,000-Watt Lightweight Stereo Power Amplifier with ATR (Accelerated Transient Response) Technology

- 2 x 2000 Watts into 2 Ohms;
2 x 1200 Watts into 4 Ohms;
4000 Watts into 4 Ohms
(bridge mode)

EUROPOWER EPX2800: Professional 2,800-Watt Lightweight Stereo Power Amplifier with ATR (Accelerated Transient Response) Technology

- 2 x 1400 Watts into 2 Ohms;
2 x 800 Watts into 4 Ohms;
2800 Watts into 4 Ohms
(bridge mode)

Common Features

- ATR (Accelerated Transient Response) technology for ultimate punch and clarity
- Ultra-light, ultra-low noise and ultra-efficient switch-mode power supply for noise-free audio, superior transient response and low power consumption
- Switchable limiters offer maximum output level with reliable overload protection
- Detented gain controls for precise setting and matching of sensitivity
- Precise Power, Signal and Limit LEDs to monitor performance
- XLR, ¼" TRS and RCA input connectors for compatibility with any source
- Professional speaker connectors and "touch-proof" binding posts support most speaker wiring systems



Ultra-light, Built on a Legacy

Power amps have always been heavy, mainly because of their massive transformers and heat sinks. Our new EPX Series amps are based on groundbreaking switch-mode power supply technology, which eliminates the heavy transformer. As a result, these amps weigh about 40% less than their conventional counterparts. In fact, the EPX2800 and EPX4000 are just 22.3 lbs (10.1 kg) each, so you can practically lift them with just one finger. Best of all, EPX Series amps are super-reliable and provide even tighter bass performance than their predecessors, since they can deliver ultra-high peak currents on demand.

In a Class of Their Own

The secret to the EPX Series' incredible power-to-weight ratio is the use of a switch-mode power supply combined with Class-H topology. Because they

work on demand, instead of operating continuously at full power, switch-mode power supplies are much more efficient than traditional power supplies. And since they don't require the massive transformers and heat sinks typically found in conventional power amps, they are significantly smaller and lighter, yet still deliver ample power.

Think of a Class-H amp as being similar to a car with two engines (in amps, we call them "rails"). One engine runs all the time. The other runs only when musical peaks demand the extra power output. An EPX Class-H amp only generates a fraction more power than is immediately needed, while the output stage operates at its maximum efficiency all the time. And just like in today's hybrid cars, the efficiency of this dual system is far greater than having just one engine or rail that has to operate continuously.

Continued on next page



EUROPOWER EPX4000/EPX2800

- Built-in Subwoofer/Satellite crossover for more flexibility
- Independent DC and thermal overload protection on each channel automatically protects amplifier and speakers without shutting down the show
- "Back-to-front" ventilation system including air filter for reliable operation
- "Built-like-a-tank", impact-resistant, all-steel 2U rackmount chassis
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany

Accelerated Transient Response Delivers the Knockout Punch

It takes huge pulses of energy (current and voltage) to propel a woofer cone out fast enough to match a bass beat. That's called Transient Response and it's the holy grail of amp designers. By carefully selecting transistors with extremely high slew rates and optimizing other proprietary parts of our circuitry, EPX amps can react instantly to even the most demanding electronic bass impulses. If the woofers in your PA system can keep up, your audience will hear a tighter, crisper, more natural sound.

BEHRINGER didn't invent Class-H technology, but our R&D Department has been working for years to perfect our own version, creating lightweight amps that run cool and achieve our goal of Accelerated Transient Response.

Everything You Need


The simple front panel controls of these amps give you all of your sound's vital signs at a glance. After pressing the Power Button, the POWER LED will light when the amp is ready for action. Both channels have independent gain dials, as well as CLIP LEDs that notify you when the signal is distorted and you need to reduce the gain. There are also SIGNAL LEDs that light up when a signal is present at the input.

Panel Discussion


The EPX Series' INPUTs accept balanced XLR, ¼" TRS, and unbalanced ¼" TS and RCA connections. Take your pick of professional locking speaker outputs or touch-proof binding posts to securely connect speakers.

Continued on next page

Front Panel

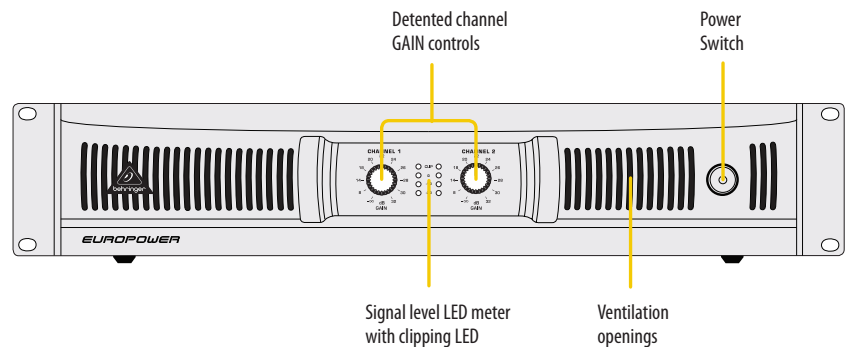

Rear Panel

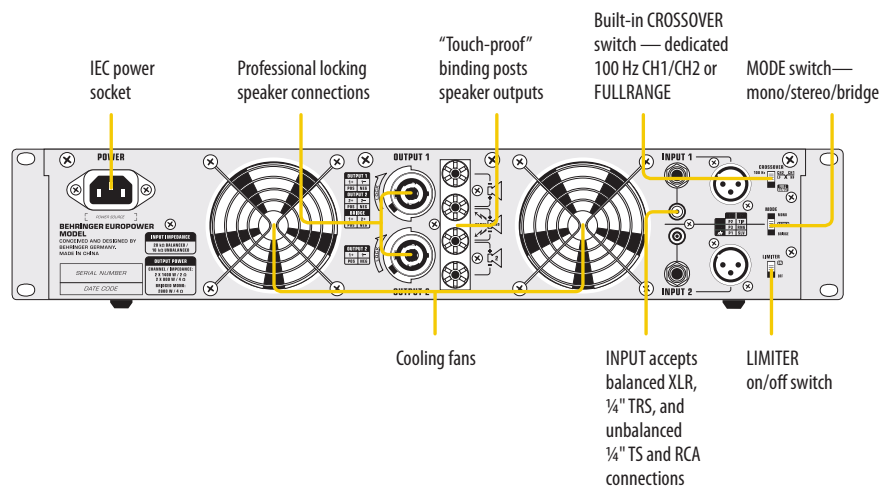

EUROPOWER EPX4000/EPX2800

A panel of switches located on the back offers an array of cool options applicable to both channels. The switchable Clip Limiter lets you get even more out of the amplifier without overdriving either it or your speaker system. Built-in circuitry automatically senses when the amp is being overdriven into "clipping" and instantaneously reduces the input level just enough to avoid clipping distortion.


Built-In Crossover

The rear panel also contains a switch that allows you to put these amps to work in mono, stereo (two-channel mode) or bridge mode, which is always mono. A built-in CROSSOVER switch lets you put the amp into biamp mode, which sends low-frequency content (<100 Hz) to the CH2 Output and the high-frequency component to CH1 automatically, no external hardware required.


Value

BEHRINGER's EPX Series amps are built for the working musician. They are much lighter than conventional power amps, pack massive power, feature built-in crossover and limiter circuits, and can withstand the rigors of the road. Plus their light price tag will leave money in your pocket to buy more stuff to amplify! Check out the EPX2800 and EPX4000 today to find out why BEHRINGER power amps are among the most popular on Earth.

Stereo Mode

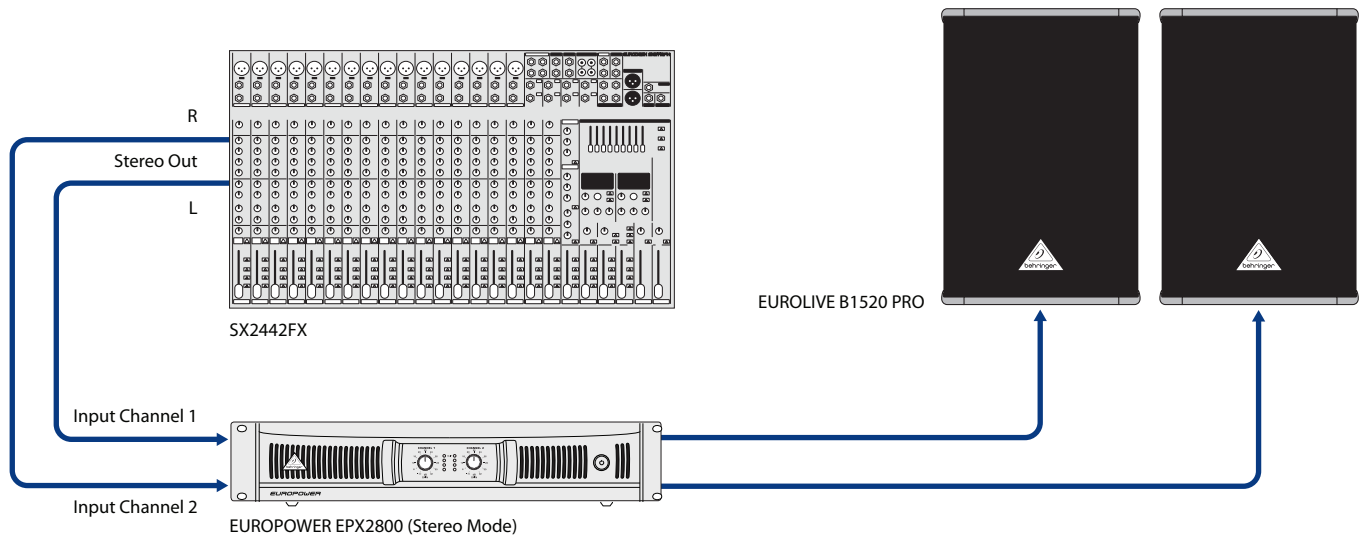


Mono Mode

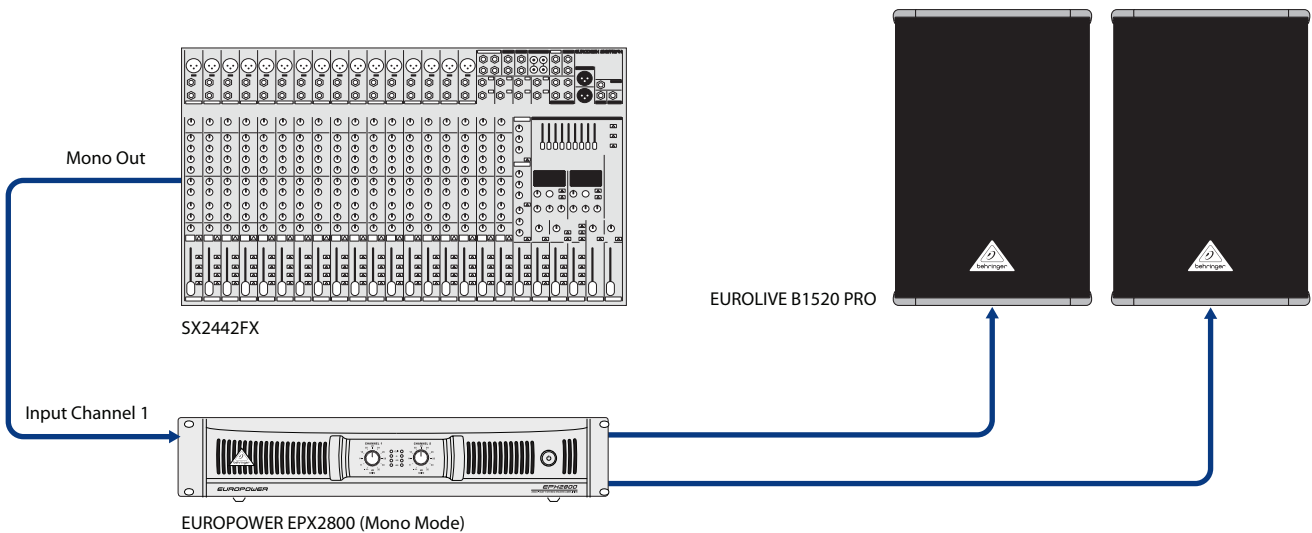

EUROPOWER EPX4000/EPX2800

Biamp Mode

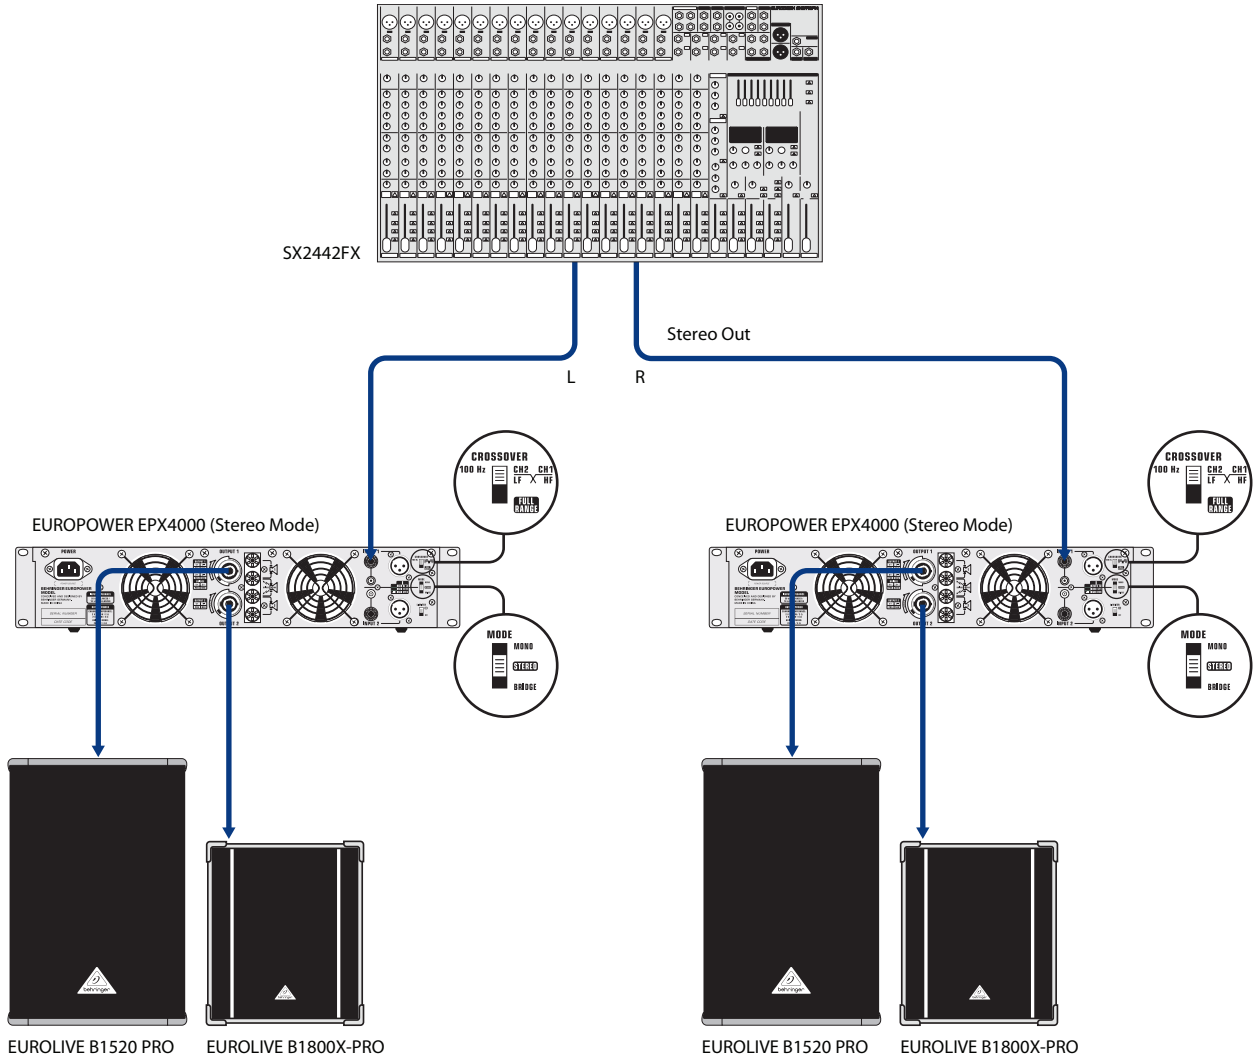

EUROPOWER EPX4000/EPX2800

Specifications

Output Power

RMS Power	
Stereo Mode (both channels driven)	

EPX4000

8 Ω per channel, stereo	530 W
4 Ω per channel, stereo	870 W
2 Ω per channel, stereo	1440 W

EPX2800

8 Ω per channel, stereo	350 W
4 Ω per channel, stereo	600 W
2 Ω per channel, stereo	990 W

EPX4000

Bridged Mono

8 Ω / 1 kHz @ 0.1% THD	1800 W
4 Ω / 1 kHz @ 1% THD	3000 W

EPX2800

Bridged Mono

8 Ω / 1 kHz @ 0.1% THD	1220 W
4 Ω / 1 kHz @ 1% THD	2000 W

EPX4000

Peak Power

Stereo Mode (both channels driven)	
8 Ω per channel, stereo	670 W
4 Ω per channel, stereo	1220 W
2 Ω per channel, stereo	2080 W

EPX2800

Peak Power

Stereo Mode (both channels driven)	
8 Ω per channel, stereo	440 W
4 Ω per channel, stereo	800 W
2 Ω per channel, stereo	1400 W

EPX4000

Bridged Mono

8 Ω bridge mode	2450 W
4 Ω bridge mode	4000 W

EPX2800

Bridged Mono

8 Ω bridge mode	1620 W
4 Ω bridge mode	2800 W

EPX4000/EPX2800

Input Sensitivity	1 V
Distortion	<0.01%
Frequency Response	20 Hz - 20 kHz, +0/-1 dB
Voltage Gain	35 dB
Damping Factor	> 300 @ 8 Ω
Input impedance	10 k Ω unbalanced, 20 k Ω balanced
Signal-to-Noise	> 100 dBA

Controls

Front	POWER switch GAIN control (channel 1 and 2)
Rear	MODE switch X-over Switch, BRIDGE MODE switch

EPX4000/EPX2800

Indicators

POWER	Blue LEDs
CLIP (per channel)	Blue LEDs
PROT (per channel)	Blue LEDs
SIGNAL (per channel) -20dB~-10dB	White LEDs
SIGNAL (per channel) -10dB~0dB	White LEDs

Connectors

Inputs	Balanced XLR, 1/4" TRS, RCA
Outputs	Speakon and "touch-proof" binding posts

EPX4000/EPX2800

Circuit protection

Cooling	Continuously variable speed fan, back to front air flow
Amplifier protection	Full short circuit, open circuit, thermal, ultrasonic, RF protection. Stable into reactive or mismatched loads
Output circuit type	Class H

EPX4000

Power supply / Voltage (Fuses)

USA / Canada	120 V~, 60 Hz (T 30 A H 250 V)
UK / Australia	240 V~, 50 Hz (T 15A H 250 V)
Europe	230 V~, 50 Hz (T 15 A H 250 V)
Japan	100 V~, 50-60 Hz (T 30 A H 250 V)
Power consumption	4500 W
Mains connector	Standard IEC receptacle

EPX2800

Power supply / Voltage (Fuses)

USA / Canada	120 V~, 60 Hz (T 20 A H 250 V)
UK / Australia	240 V~, 50 Hz (T 10A H 250 V)
Europe	230 V~, 50 Hz (T 10 A H 250 V)
Japan	100 V~, 50-60 Hz (T 20 A H 250 V)
Power consumption	3000 W
Mains connector	Standard IEC receptacle

EPX4000/EPX2800

Dimensions/weight

Dimensions (H x W x D)	3.46 x 19.01 x 14.68" 88 x 483 x 373 mm
Weight	22.26 lbs / 10.10 kg

Please note these specifications are preliminary and conceptual in nature, and as such are subject to change as product development progresses. This information is supplied for market research purposes only and is not to be made public in any manner. This document is solely the property of The MUSIC Group, or one of its subsidiaries, and must be surrendered upon request of the owner.

For service, support or more information contact the BEHRINGER location nearest you:

Europe
MUSIC Group Services UK
Tel: +44 156 273 2290
Email: CARE@music-group.com

USA/Canada
MUSIC Group Services NV Inc.
Tel: +1 702 800 8290
Email: CARE@music-group.com

Japan
MUSIC Group Services JP K.K.
Tel.: +81 3 6231 0454
Email: CARE@music-group.com

Technical specifications and appearances are subject to change without notice and accuracy is not guaranteed. BEHRINGER is part of the MUSIC Group (music-group.com). All trademarks are the property of their respective owners. MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colors and specifications may vary from actual product. MUSIC Group products are sold through authorized fulfillers and resellers only. Fulfillers and resellers are not agents of MUSIC Group and have absolutely no authority to bind MUSIC Group by any express or implied undertaking or representation. This manual is copyrighted. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of MUSIC Group IP Ltd. ALL RIGHTS RESERVED. © 2012 MUSIC Group IP Ltd. Trident Chambers, Wickhams Cay, P.O. Box 146, Road Town, Tortola, British Virgin Islands. 985-10000-00472