



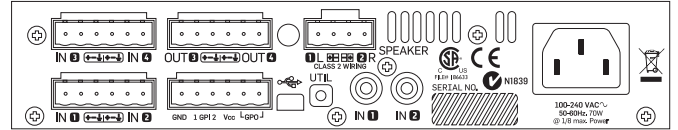

# LUCIA<sup>®</sup> 60/2M

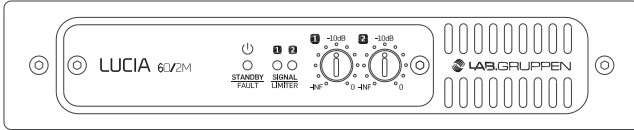

The following tables contain information on measured current consumption as well as calculated heat dissipation during what we see as the most extreme sustained normal operation (1/8 rated power).

LUCIA 60/2M										
Level	Load	Output power		Mains voltage	Line current	Watt *1)			Thermal Dissipation	
				VAC	IAC	In	Out	Dissipated	BTU/hr	kCal/hr
Standby w. remote Power Off.				230	0.03	1	0	1	3	1
				120	0.03	1	0	1	3	1
				100	0.03	1	0	1	3	1
Power on, Idling				230	0.1	15	0	15	51	13
				120	0.2	13	0	13	46	12
				100	0.2	14	0	14	48	12
Pink Pseudo Noise (1/8)	16 Ω / Ch.	15	x 2	230	0.2	21	4	18	61	15
				120	0.3	19	4	15	52	13
				100	0.3	20	4	16	55	14
	8 Ω / Ch.	30	x 2	230	0.2	27	8	19	65	16
				120	0.3	24	8	16	55	14
				100	0.4	25	8	17	59	15
	4 Ω / Ch.	30	x 2	230	0.2	27	8	19	67	17
				120	0.3	24	8	17	58	15
				100	0.4	25	8	18	60	15
	2 Ω / Ch.	30	x 2	230	0.2	28	8	20	69	17
				120	0.3	25	8	18	60	15
				100	0.4	26	8	18	63	16

\*1) The amplifier's PSU operates as a non-resistive load, so the calculation "Volts x Amps = Watts" would not be correct. Instead, measured and specified here is what is known as the "Active Power" in the amplifier providing useful, real-world values of power consumption and heat dissipation.