

## Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with Transformer for Installation Applications

- Full range surface-mount loudspeaker for indoor and outdoor installation applications
- 40 Watts continuous, 160 Watts peak power
- 4" mineral loaded polypropylene driver with nitrile rubber surround for enhanced durability and long-term reliability
- 0.75" ferrofluid cooled soft dome neodymium high frequency driver
- 110° constant directivity dispersion for optimum coverage
- UL 1480 certified for general signalling systems
- UV and weather resistant UL 94 V-0 ABS enclosure
- Multiple transformer taps for 70 V and 100 V line systems
- Low insertion loss 30 W line transformer with easily accessible tapping switch
- All components weather resistant to IP64 for outdoor use
- Stylish durable enclosure in a semi matt black paint finish fits unobtrusively in any environment
- Painted perforated aluminium mesh grille with dust protection
- Yoke bracket included for ease of installation
- Phoenix\* connectors input and link output
- 5-Year Warranty Program\*
- Designed and engineered in the U.K.

Designed to excel in a wide variety of sound reinforcement applications, the full range DVS 4T is an ultra-compact 160-Watt surface mount loudspeaker that provides both exceptional value and inspiring acoustic performance. The DVS 4T is ideally suited for stereo or mono background/foreground music applications in theme parks, hotels, restaurants and bars, retail stores, as well as corporate AV, residential developments, and houses of worship.



## Superb Point-Source Performance

DVS 4T's point-source design comprises a 100 mm (4.00") mid bass driver with a coaxially mounted 19 mm (0.75") high frequency section mounted in a stylish injection moulded ABS enclosure. Certified for water and dust ingress protection to IP64 standard, the DVS 4T is an exceptional choice for challenging environments such as indoor swimming pools, saunas, or work areas with unusually high levels of dust or moisture, and outdoor applications where weather conditions are moderate.

\*All third-party trademarks are the property of their respective owners. Their use neither constitutes a claim of the trademark nor affiliation of the trademark owners with MUSIC Group. Product names are mentioned solely as a reference for compatibility, effects and/or components. Warranty details can be found at music-group.com.

## Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with Transformer for Installation Applications

### Attractive and Easy to Install

The highly durable and scuff resistant ABS enclosure features a black painted finish, and comes with an aesthetically pleasing aluminium grille. Installation is quick and easy, thanks to the included colour-matched steel mounting bracket and finger-adjustable hardware on the enclosure top and bottom. The DVS 4T is equipped with an internally mounted low insertion loss line transformer for 70 V or 100 V distributed sound applications. Wattage taps are configurable over a range of settings via a rotary tapping switch located on the back panel. Phoenix\* connectors for input and link output are provided for convenience.



### You Are Covered


We always strive to provide the best possible Customer Experience. Our products are made in our own [MUSIC Group](#) factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous [5-Year Warranty](#) program.

## Install Speakers


# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with Transformer for Installation Applications

### Frequency Response Sensitivity 1 W / 1 m

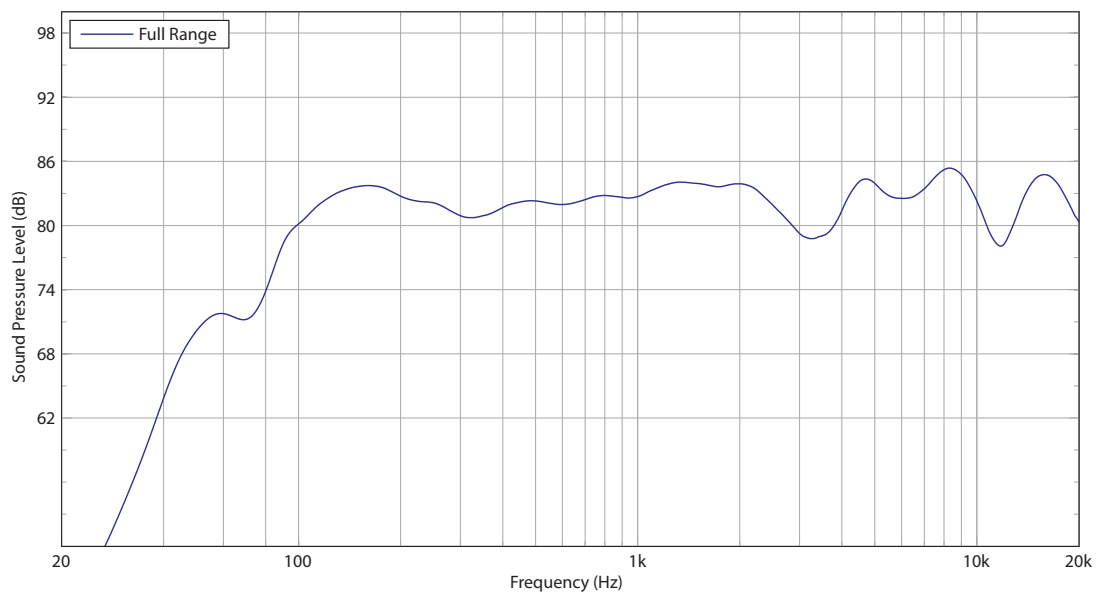

### Impedance

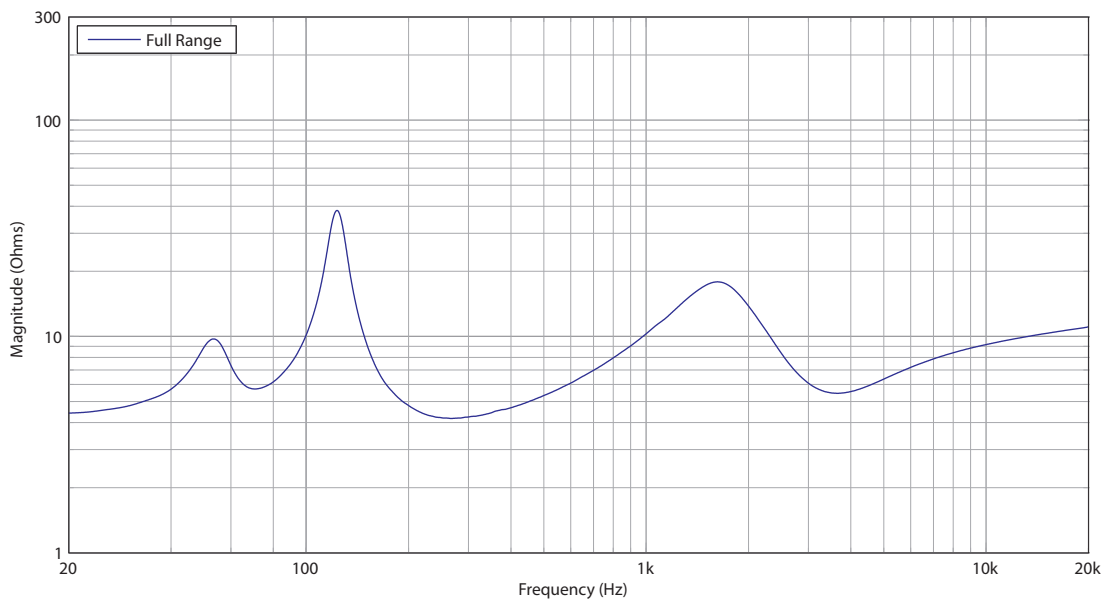


## Install Speakers


# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with Transformer for Installation Applications

### Horizontal Beamwidth

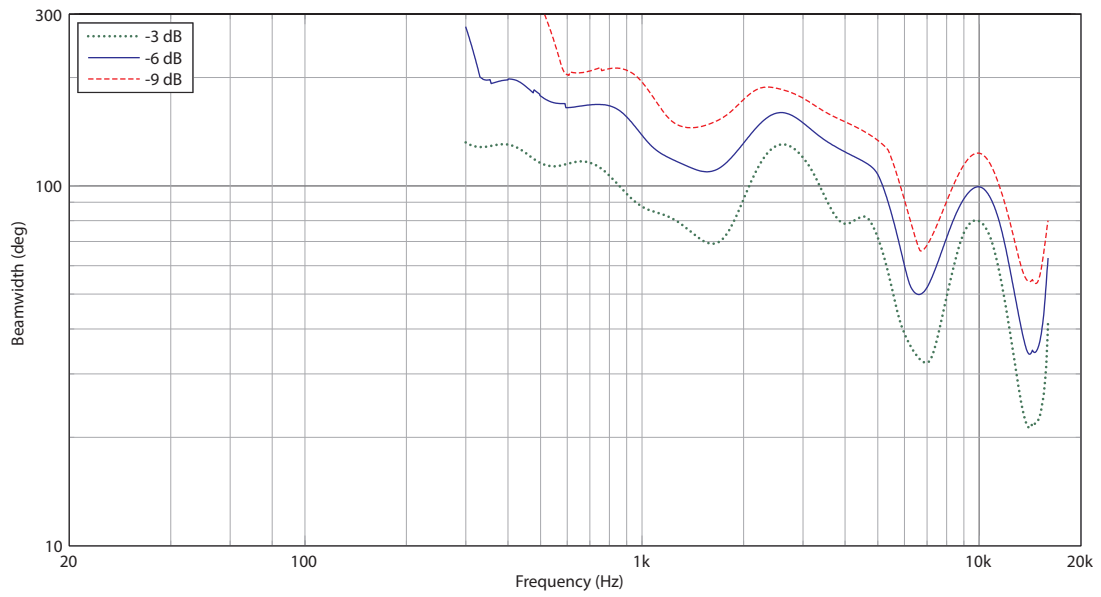

### Vertical Beamwidth





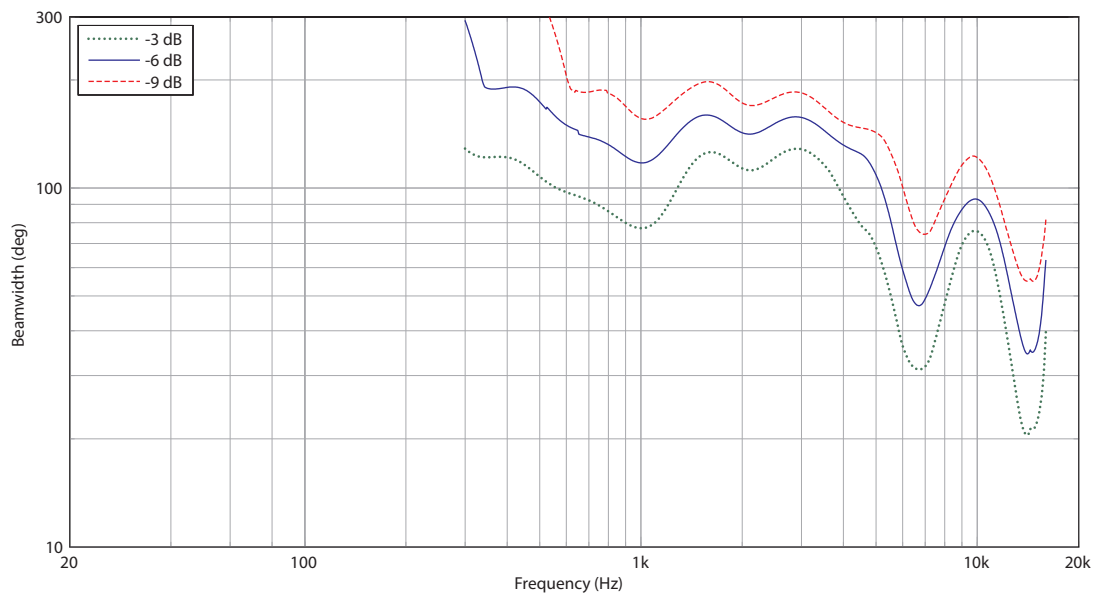


## Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with Transformer for Installation Applications

## Horizontal Polar Plots

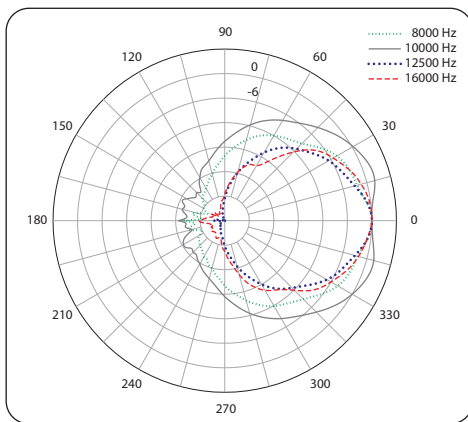
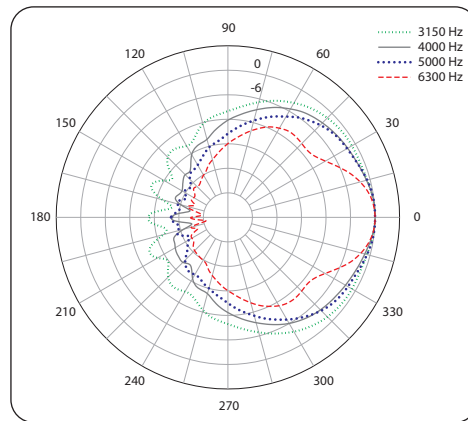
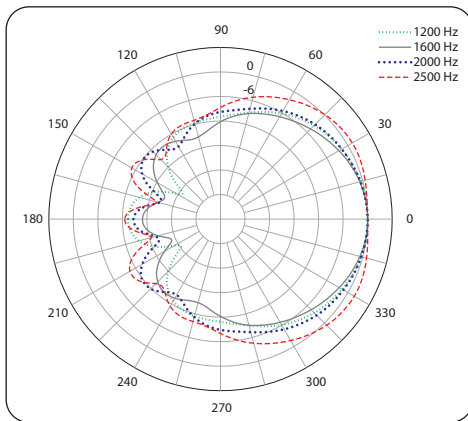
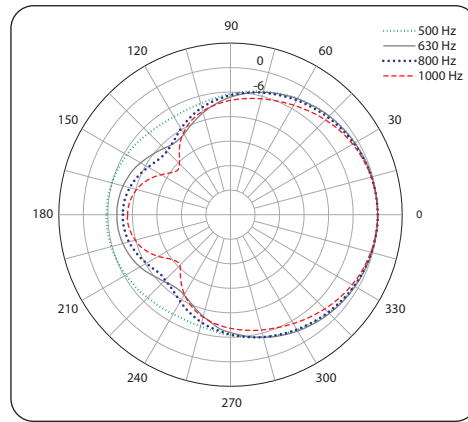
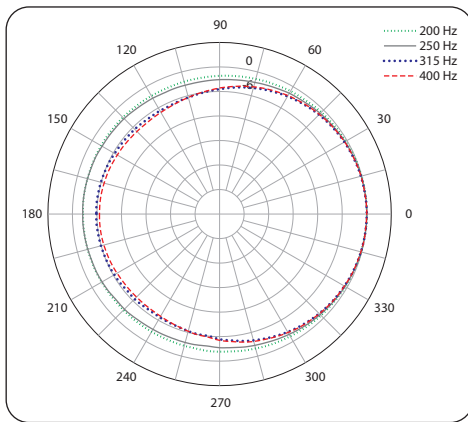


## Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with Transformer for Installation Applications

## Vertical Polar Plots

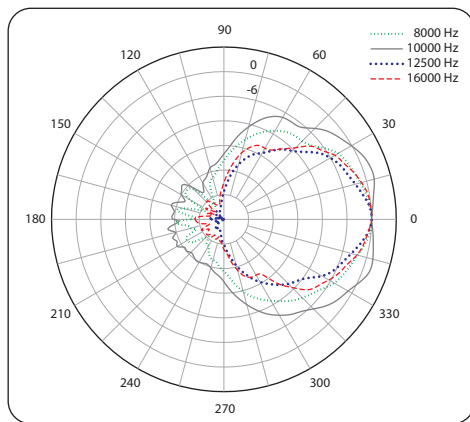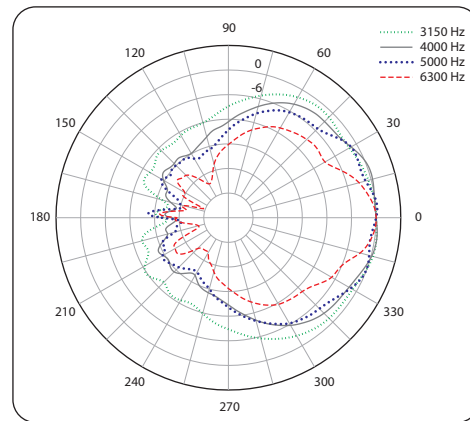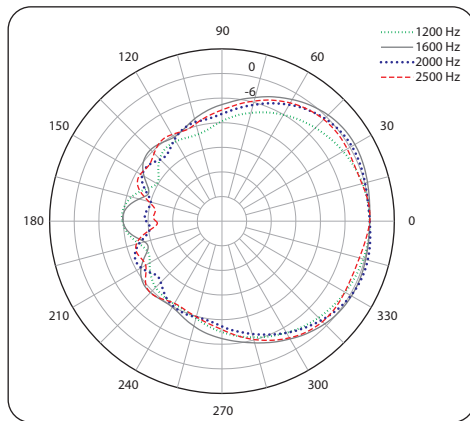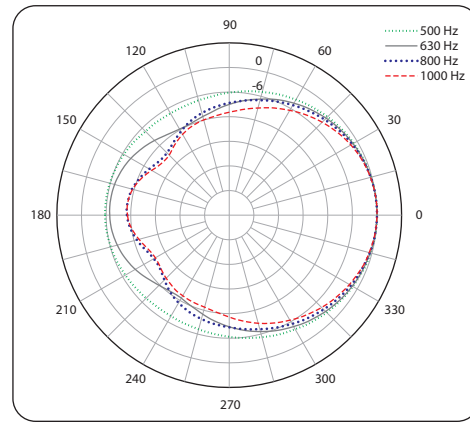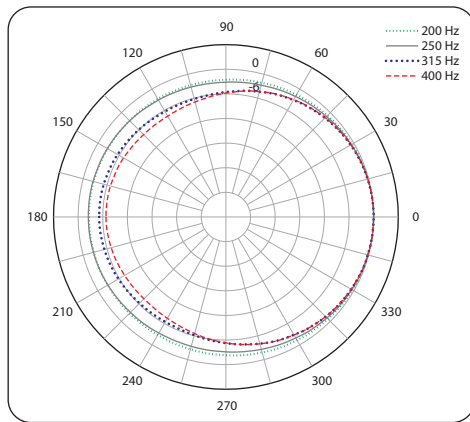


## Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with Transformer for Installation Applications

## Dimensions

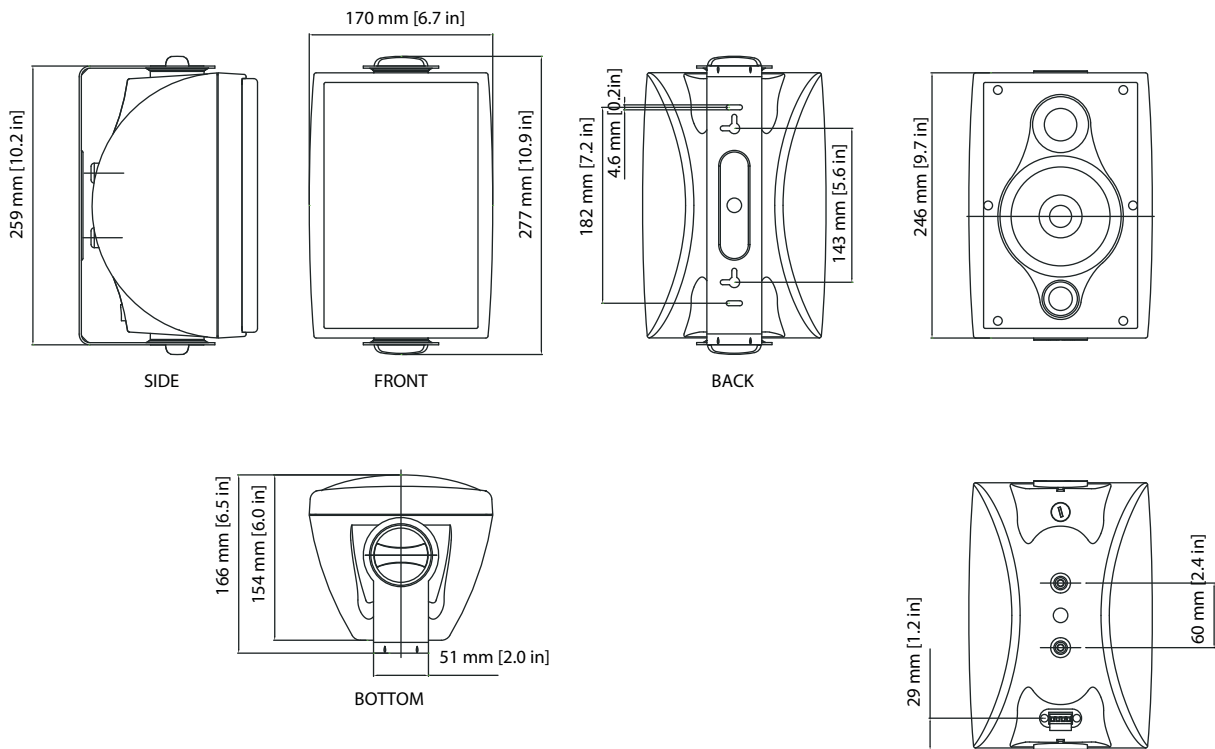



## Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with Transformer for Installation Applications

## Technical Specifications

### Performance

Frequency response (-3 dB) <sup>1</sup>	75 Hz - 20 kHz
Frequency response (-10 dB) <sup>1</sup>	60 Hz - 30 kHz
System sensitivity (1 W @ 1 m) <sup>2</sup>	84 dB
Dispersion (-6 dB)	110 degrees conical
Transducers	Coaxial
Low frequency	100 mm (4.00") mineral loaded cone material
High frequency	20 mm (0.79)
Crossover	3.9 kHz - 2nd order LF, 2nd order HF
Directivity (Q)	6.5 averaged 1 kHz to 10 kHz
Directivity (DI)	5.3 averaged 1 kHz to 10 kHz
Rated maximum SPL <sup>2</sup>	100 dB (average) 106 dB (peak)

### Transformer Version

Transformer taps	
70 V	30 W (165 Ω) / 15 W (330 Ω) / 7.5 W (660 Ω) / 3.75 W (1320 Ω) / OFF & low impedance operation
100 V	30 W (330 Ω) / 15 W (660 Ω) / 7.5 W (1320 Ω) / OFF & low impedance operation
Maximum wire gauge for connector	2.5 mm CSA (AWG12)
Safety Agency Ratings	UL-1480, CE

### Power Handling

Average	40 W
Programme	80 W
Peak	160 W
Recommended amplifier power	80 W @ 6 Ohms
Nominal impedance	6 Ohms

### Construction

Enclosure	ABS
Grille	Aluminium, painted
Connectors	Euroblock type removable locking connector with screw terminals with "loop through" facility
Supplied accessories	Yoke bracket
Packed quantity	2
Dimensions (H x W x D)	277.0 x 170.4 x 165.6 mm (10.91 x 6.71 x 6.52")
<b>Non-transformer versions</b>	
Net weight	2.3 kg (5 lbs)
Shipped weight	5.7 kg (12.6 lbs)
<b>Transformer versions</b>	
Net weight	2.8 kg (6.2lbs)
Shipped weight	6.7 kg (15 lbs)

#### Notes

- (1) Average over stated bandwidth. Measured at 1 metre on axis in an anechoic chamber  
(2) Unweighted pink noise input, measured at 1 metre in an anechoic chamber

A full range of measurements, performance data, and Ease Data can be downloaded from [www.tannoy.com](http://www.tannoy.com)

Tannoy operates a policy of continuous research and development. The introduction of new materials or manufacturing methods will always equal or exceed the published specifications, which Tannoy reserves the right to alter without prior notice. Please verify the latest specifications when dealing with critical applications.



## Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with  
Transformer for Installation Applications



## Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with  
Transformer for Installation Applications



Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with  
Transformer for Installation Applications



Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with  
Transformer for Installation Applications




Install Speakers

# DVS 4T

4" Coaxial Surface-Mount Loudspeaker with Transformer for Installation Applications


SUSPENDING THIS SYSTEM SHOULD ONLY BE DONE BY QUALIFIED PERSONS FOLLOWING SAFE INSTALLATION STANDARDS



UL LISTED

Type: G  
US 3PHS

MADE IN CHINA



SPEAKER: DVS 4T

INPUT	POWER	WIRING	PASSIVE
70V LINE	3.75, 7.5, 15, 30 W	1+ / 2-	INPUT
100V LINE	7.5, 15, 30 W	3- / 4+	LINK
6 Ω	80 W PROGRAM	N/A	N/A

REFER TO INSTALLATION WIRING DIAGRAM IN QUICK START GUIDE

TANNOY

DESIGNED AND ENGINEERED IN THE U.K.



For service, support or more information contact the TANNOY location nearest you:

**Europe**  
**MUSIC Group Services UK**  
 Tel: +44 1562 547 100  
 Email: CARE@music-group.com

**USA/Canada**  
**MUSIC Group Services NV Inc.**  
 Tel: +1 702 963 1300  
 Email: CARE@music-group.com

**Japan**  
**MUSIC Group Services JP K.K.**  
 Tel: +81 3 5833 9121  
 Email: CARE@music-group.com

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd.  
 © MUSIC Group IP Ltd. 2017 All rights reserved.

