

## Install

# VSX 10BP-WH

10" Compact Band Pass Passive Subwoofer for Portable and Installation Applications (White)



- Compact band pass subwoofer for portable and installation applications
- 200 Watts continuous, 800 Watts peak power
- 10" bass driver for extended low frequency system response to below 40 Hz
- Low distortion dual port design for maximum sound pressure levels
- Ideal for background music playback in clubs, bars, theatres and AV applications
- Internally braced plywood enclosure
- Finished with a hard wearing semi matt white paint finish
- Blanking plate for optional VTH pole mount
- Integral M10 rigging points for ease of installation
- Integrip handle ergonomically integrated into back of cabinet
- Neutrik speakON\* NL4 and barrier strip connectors for input and link output
- 10-Year Warranty Program\*
- Designed and engineered in the U.K.

The VSX 10BP-WH is a compact 10" 800-Watt passive band pass subwoofer that is ideally suited for a broad range of speech and music sound reinforcement applications in both fixed, portable, and touring audio systems. VSX 10BP-WH's superb low frequency reproduction makes it the perfect choice for deployment in clubs, bars, theatres and AV applications.



## Stunning Performance

A dual ported band pass system, the VSX 10BP-WH features a 10" low frequency driver that provides extended low frequency response to well below 40 Hz – for chest-pounding bass. Fast and accurate transient response enables the VSX 10BP-WH Subwoofer to generate copious quantities of tight low end output that is virtually distortion-free.

## Install

# VSX 10BP-WH

10" Compact Band Pass Passive Subwoofer for Portable and Installation Applications (White)

### Band Pass Enclosure Design

Band pass enclosures are extremely efficient, creating maximum bass output within a specific frequency range by increasing the acoustic load presented to the driver. The low distortion band pass design utilised in the VSX 10BP-WH reinforces the bass musical instrument frequencies, and steep cut-off slopes ensure an effective acoustic transition for use with full-range loudspeakers. A typical application could consist of a VSX 10BP-WH providing the low-frequency bass extension for one, or two VX Series top cabinets.



### Versatility

VSX 10BP-WH Subwoofers can be easily deployed in a multitude of configurations, thanks to the integral M10 rigging points and blanking plate for an optional VTH pole mount. For touring and portable applications, the enclosures also feature our Integrip handles, which are ergonomically integrated into the rear of each cabinet.

### Construction and Connectivity

Finished in a hard wearing semi matt white paint, the cabinet is constructed of internally braced plywood and includes a rugged powder coated perforated steel mesh grille backed with reticulated foam. The rear panel connector plate carries Neutrik speakON® NL4 and barrier strip connectors for input and link connections to accommodate additional subwoofer, or satellite full range loudspeakers.



# VSX 10BP-WH

10" Compact Band Pass Passive Subwoofer for  
Portable and Installation Applications (White)



## You Are Covered


We always strive to provide the best possible Customer Experience. Our products are made in our own MUSIC Tribe factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous Warranty program.

Install


# VSX 10BP-WH

10" Compact Band Pass Passive Subwoofer for Portable and Installation Applications (White)

## Frequency Response Sensitivity 1 W / 1 m

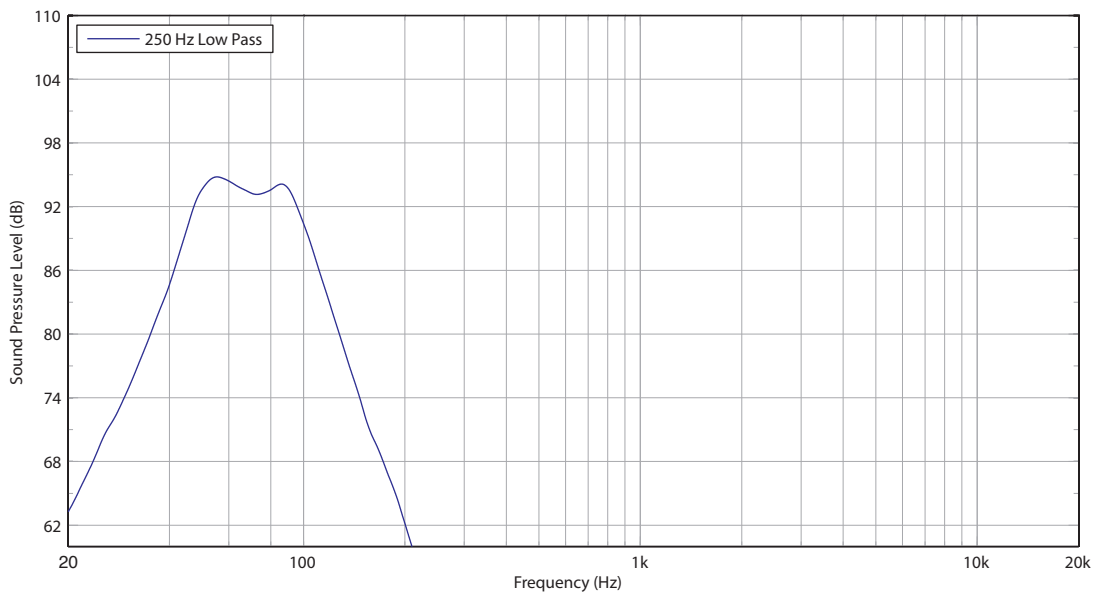

## Impedance

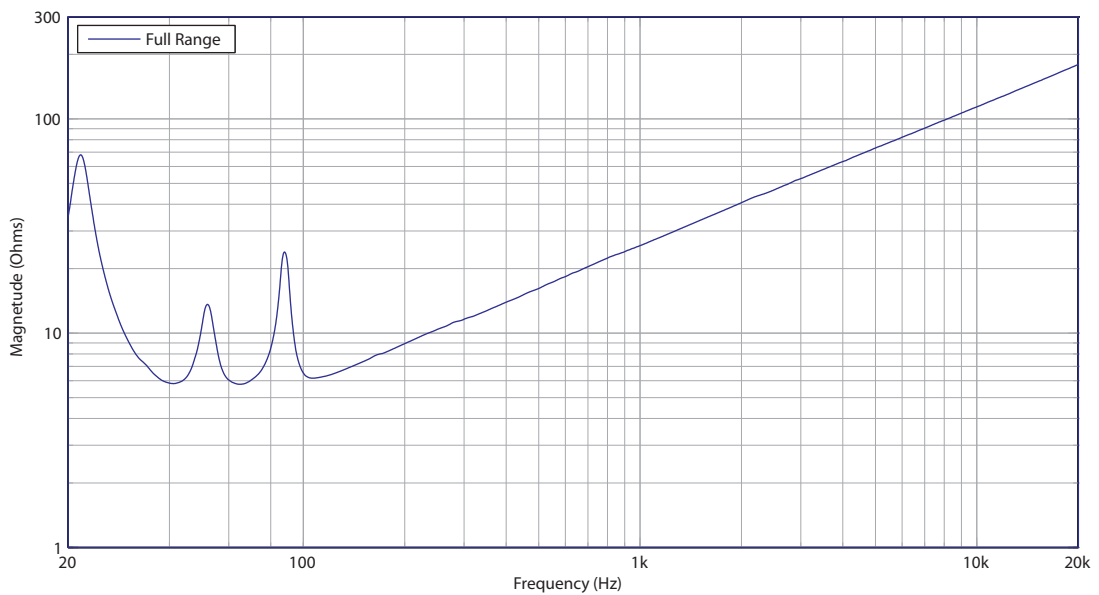


# Install

## VSX 10BP-WH

10" Compact Band Pass Passive Subwoofer for Portable and Installation Applications (White)

### Dimensions

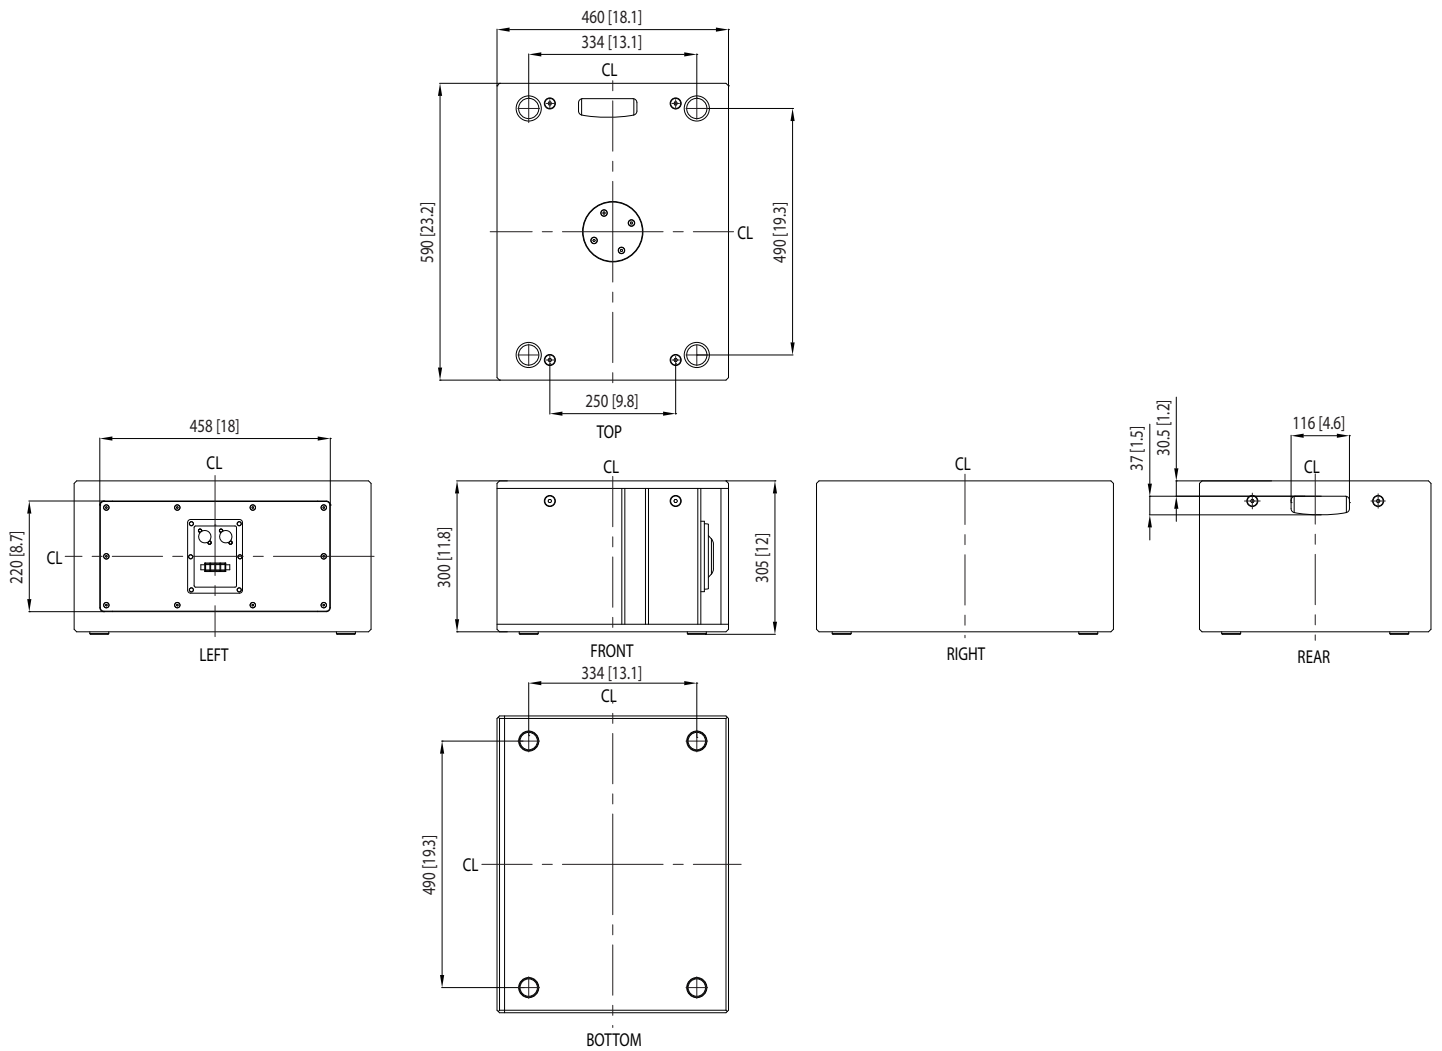

## Install

# VSX 10BP-WH

10" Compact Band Pass Passive Subwoofer for Portable and Installation Applications (White)

## Technical Specifications

### System

|                                |  |
|--------------------------------|--|
| Frequency Response             | 42 Hz – 110 Hz $\pm$ 3 dB<br>36 Hz – 130 Hz -10 dB |
| Recommended Low Pass Crossover | 80 – 110 Hz 24 dB/Oct                              |
| Nominal Dispersion             | Half space   |
| Power Handling (IEC)           | 200 W continuous, 800 W peak                       |
| Sensitivity                    | 93 dB (1 W @ 1 m)                                  |
| Maximum SPL                    | 116 dB continuous, 122 dB peak                     |
| Impedance                      | 8 $\Omega$   |
| Components                     | 1 x 10" (260 mm) LF driver                         |

### Enclosure

|                      |   |
|----------------------|---|
| Connectors           | 2 x Neutrik speakON* NL4<br>1 x barrier strip terminals |
| Wiring               | Pins 1+ / 1- input, pins 2+ / 2- link                   |
| Parallel             | —   |
| Discreet             | —   |
| Dimensions H x W x D | 306 x 590 x 460 mm (12.0 x 23.2 x 18.1")                |
| Net Weight           | 17.7 kg (39.0 lbs)                                      |
| Construction         | 15 mm (5/8") birch plywood                              |
| Finish               | Semi matt white paint                                   |
| Grille               | Powder coated perforated steel                          |
| Flying Hardware      | M10 x 8 points  |

### Accessories

Blanking plate for optional VTH pole mount



Install

# VSX 10BP-WH



10" Compact Band Pass Passive Subwoofer for  
Portable and Installation Applications (White)



Install

# VSX 10BP-WH

10" Compact Band Pass Passive Subwoofer for Portable and Installation Applications (White)

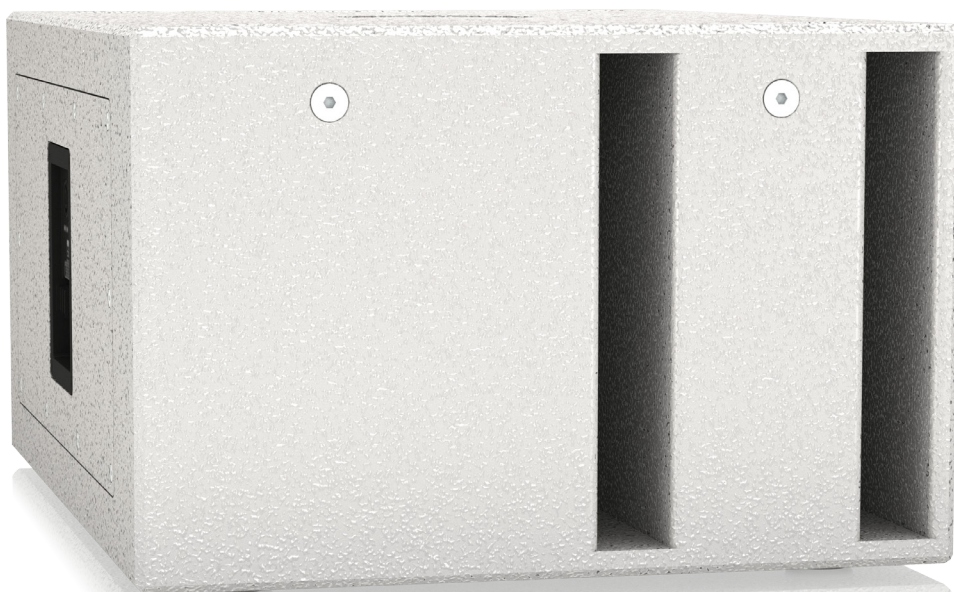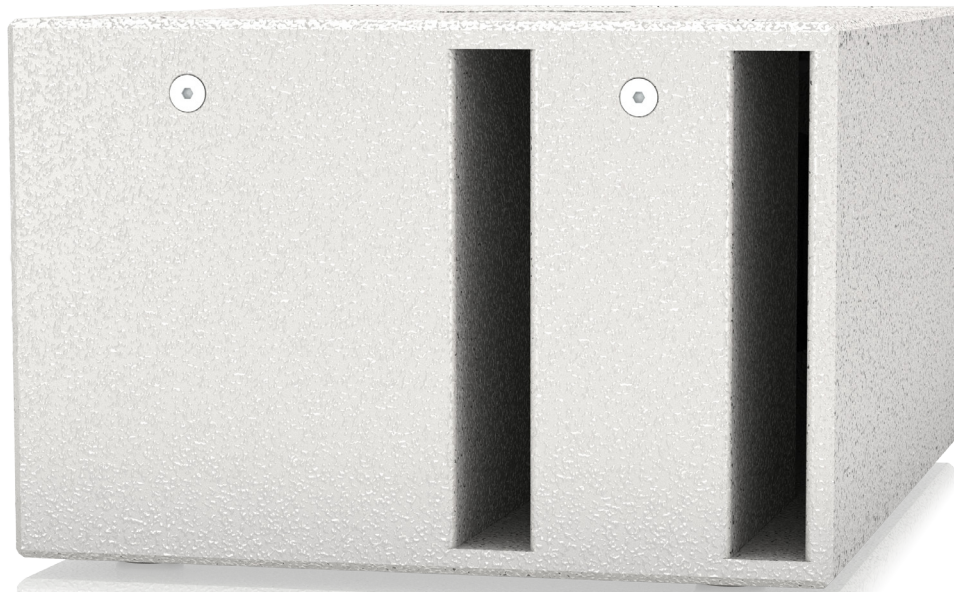



Install

# VSX 10BP-WH

10" Compact Band Pass Passive Subwoofer for Portable and Installation Applications (White)



For service, support or more information contact the TANNOY location nearest you:

**Europe**  
**MUSIC Tribe Brands UK Ltd.**  
 Tel: +44156 273 2290  
 Email: CARECrea@music-group.com  
 CAREEnte@music-group.com  
 CARELife@music-group.com

**USA/Canada**  
**MUSIC Tribe Commercial NV Inc.**  
 Tel: +1 702 800 8290  
 Email: CARECrea@music-group.com  
 CAREEnte@music-group.com  
 CARELife@music-group.com

**Japan**  
**MUSIC Tribe Services JP K.K.**  
 Tel: +81 3 6231 0453  
 Email: CARECrea@music-group.com  
 CAREEnte@music-group.com  
 CARELife@music-group.com

MUSIC Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and COOLAUDIO are trademarks or registered trademarks of MUSIC Tribe Global Brands Ltd. © MUSIC Tribe Global Brands Ltd. 2018 All rights reserved.

