

Quick Start Guide



HALL OF FAME 2 X4 REVERB

EN

- 1 **Reverb Type** – Select reverb type or TonePrint 1-6.
- 2 **DECAY** – Adjusts the length of the reverb.
- 3 **PRE DELAY** – Adjusts the amount of time between the dry sound and reverb.
- 4 **TONE** – Adjusts the brightness of the reverb.
- 5 **BANK/STORE** – Press the switch up to toggle between presets 1-4 or 5-8. Press the switch down to store the current settings to the selected preset.
- 6 **LEVEL** – Adjusts the level of the reverb.
- 7 **MASH LED** – Indicates the intensity of MASH functionality.
- 8 **Footswitches** – Tap to select presets 1-4 or 5-8, depending on the Bank ½ setting. Press and hold a footswitch to engage MASH and control the selected parameter.
- 9 **INPUT** – Connect your guitar to the Mono input using a standard ¼" instrument cable. If using a stereo signal, connect the left channel to Mono and right channel to Stereo.

- 10 **OUTPUT** – Connect a standard ¼" instrument cable to the Mono output jack and to the next pedal in your chain, or to an amplifier. If using a stereo signal, send the left signal from the Mono jack and the right signal from the Stereo jack.
- 11 **EXP** – Connect an optional expression pedal to control parameters like decay or level.
- 12 **BYPASS** – Select between True Bypass or Buffered Bypass operation.
- 13 **KILL DRY** – Engage Kill Dry to remove the direct signal, sending only the reverb signal to the outputs.
- 14 **POWER** – Connect a 9 V / ≥300 mA power supply.
- 15 **USB** – Connect to a computer for firmware updates and TonePrint editing.
- 16 **MIDI** – Connect standard 5-pin DIN cables to control preset changes, MASH, potentiometer values, and more.

Visit tcelectronic.com to download the full manual

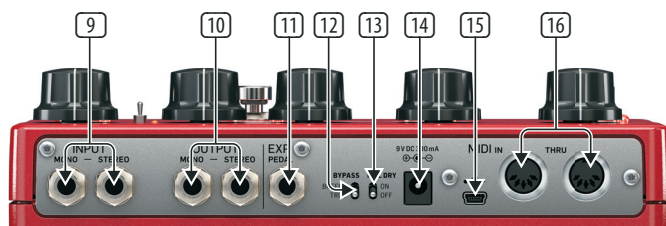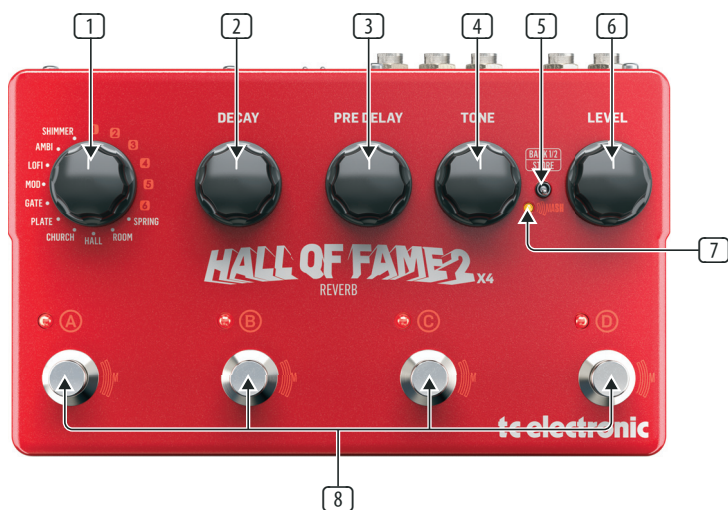

Specifications

Connectors	
Inputs	2 x ¼" TS, unbalanced
Impedance	≥1 MΩ
Outputs	2 x ¼" TS, unbalanced
Impedance	100 Ω
Expression pedal input	¼" TRS connector
USB port	Mini USB connector for firmware updates and TonePrint App
MIDI In/Thru	5-pin DIN connector
Bypass mode	True bypass (buffered bypass selectable)
Power	
Connector	Standard 9 V DC, center negative, ≥300 mA (included)
Physical	
Dimensions (HWD)	56 x 235 x 145 mm (2.2 x 9.3 x 5.7")
Weight	1.3 kg (2.9 lbs)

LEGAL DISCLAIMER

Music Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. Midas, Klark Teknik, Lab Gruppen, Lake, Tannoy, Turbosound, TC Electronic, TC Helicon, Behringer, Bugera and Coolaudio are trademarks or registered trademarks of Music Tribe Global Brands Ltd. © Music Tribe Global Brands Ltd. 2018 All rights reserved.

LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding Music Tribe's Limited Warranty, please see complete details online at musictribe.com/warranty.

Zhongshan Eurotec Electronics Limited

No. 10 Wanmei Road, South China Modern Chinese Medicine Park, Nanlang Town, 528451, Zhongshan City, Guangdong Province, China

tc electronic