


PRO SPLITTER 2 DS 20

EN

Passive 1-In / 2-Out Signal Splitter with MIDAS Transformer and Extended Dynamic Range

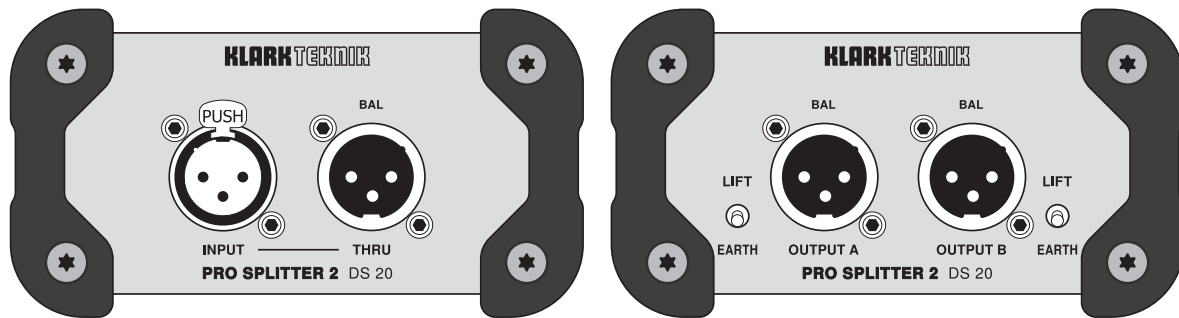

INPUT – connection accepts balanced and unbalanced signals over cables with XLR connectors.

THRU – output sends out a copy of the INPUT signal and accepts connections from balanced audio cables with XLR connectors.

LIFT / EARTH – switch can be used to connect or disconnect the ground link between the INPUT and OUTPUT A/B jacks in order to reduce hum or prevent ground loops. The LIFT / EARTH switch's ability to reduce hum or prevent ground loops depends on the grounding of connected devices. When the switch is in the LIFT position, the ground connection between INPUT and OUTPUT is disconnected. The OUTPUT A and OUTPUT B jacks each have their own dedicated LIFT / EARTH switch.

Specifications

Audio Connections	
Input	1 x XLR, balanced
Input impedance	1.9 kΩ, balanced
Thru	1 x XLR, balanced
Output A/B	2 x XLR, balanced
System	
Frequency response	30 Hz to 45 kHz, ±3 dB
Dynamic range	+124 dB
THD+N	< 0.03 % @ 1 kHz, +4 dBu
S/N ratio	> 100 dB @ +4 dBu
Dimension / Weight	
Dimensions (W x D x H)	118 x 120 x 64 mm (4.6 x 4.7 x 2.5")
Weight	0.6 kg (1.3 lbs)

LEGAL DISCLAIMER

MUSIC Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and COOLAUDIO are trademarks or registered trademarks of MUSIC Tribe Global Brands Ltd. © MUSIC Tribe Global Brands Ltd. 2018 All rights reserved.

LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding MUSIC Tribe's Limited Warranty, please see complete details online at musictri.be/warranty.